


Hazloc Globe

LED Replacement • LED Fixture

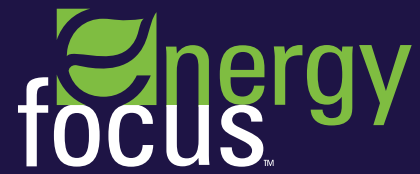

Specifications

ENCLOSURE TYPE Hazardous location globe luminaire with stainless steel guard

HAZARDOUS LOCATION RATING Class I Division 2, Groups A, B, C, and D

LUMEN OUTPUT 2800 lm

WATTAGE 30W

EFFICACY >100 lm/W

CRI >70

CCT 4000 +/- 200

LAMP LIFE 50,000 hours to 70% lumen maintenance

INPUT VOLTAGE 100-277VAC (Standard voltage option)
347-480VAC (High voltage option)

CHASSIS Enameled aluminum

LENS Diffuse glass

WEIGHT 7lb

DRIVER Constant current, integrated

OPERATING TEMPERATURE -30°C to 50°C

POWER FACTOR >0.90 at 277VAC, >0.80 at 480VAC, 50/60Hz


MOUNTING Ceiling (Pendant and wall available)

REGULATORY APPROVAL UL 1598A [Outside Type (Salt Water)] and UL 844 [Wet Location Listed], ABS, UL 1598 and UL 8750

SOURCING Made in America



DESCRIPTION	EFO SKU
30W HAZLOC Globe , 70+CRI, 4000K CCT, Flat Mount	LEDGL-740-30HAZ-F
30W HAZLOC Globe , 70+CRI, 4000K CCT, Pendant Mount	LEDGL-740-30HAZ-P
30W HAZLOC Globe , 70+CRI, 4000K CCT, Vessel Mount	LEDGL-740-30HAZ-VES
30W HAZLOC Globe , 70+CRI, 4000K CCT, Flat Mount, High Voltage	LEDGL-740-30HAZ-F-HV
30W HAZLOC Globe , 70+CRI, 4000K CCT, Pendant Mount, High Voltage	LEDGL-740-30HAZ-P-HV
30W HAZLOC Globe , 70+CRI, 4000K CCT, Vessel Mount, High Voltage	LEDGL-740-30HAZ-VES-HV

TO ORDER  **LED LIGHTING SOLUTIONS** www.LEDLightingSolutions.com Main: 855.309.1702 Direct: 941.405.6473 kbutton@1lls.com

