


Intellitube[®]

LED Replacement • 12" T5 LED Lamp



Specifications

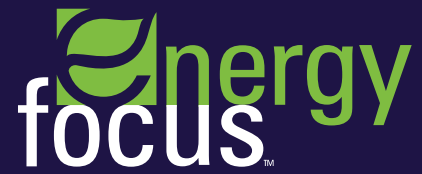

LUMEN OUTPUT 350
WATTAGE 3.2W
EFFICACY 110 lp/W
CRI 80
CCT 4100 +/- 297
LAMP LIFE 50,000 hours to 70% lumen maintenance
INPUT VOLTAGE 120 VAC (compatible with standard fluorescent)
CHASSIS Unibody aluminum
LENS Polycarbonate
WEIGHT 40g
ENCLOSURE TYPE T5 LED Lamp
DIMENSIONS 16 mm diameter x 305 mm length (or 5/8" x 12")

FEATURES

- Conveniently "snaps" into legacy, unmodified lighting fixtures
- Increased levels of lumen output
- Lower power consumption
- Significantly longer lifespan
- Safer, containing no mercury
- Low maintenance costs
- Rapid return on investment



**MIL-16377 (SSL) for Navy Standard Symbol #
MIL-F-16377/ 7, /9, /14, /16, /17, /49, /59 & /86**

NSN#: 6240-01-650-0055

FUNCTION: United States Navy

APPLICATION: General Lighting & Detail Lighting


Intellitube® LED Replacement Lamp Fixture Reference Guide

Replaceable for the following SYM #'s:

2 LAMP FIXTURE MIL-F-16377/7




SYM 70.3 /7
SYM 70.4 /7



SYM 78.2 /7
SYM 336.1 /7

3 LAMP FIXTURE MIL-F-16377/9




SYM 73.3 /9
SYM 73.4 /9



SYM 346.2 /9
SYM 346.3 /9

1 LAMP FIXTURE MIL-F-16377/14



SYM 79.1 /14
SYM 79.2 /14




SYM 80.1 /14
SYM 80.2 /14

DESK LIGHT MIL-F-16377/16




SYM 141.2 /16




SYM 150.2 /16

BERTH LIGHT MIL-F-16377/17



SYM 229.1 /17




SYM 232.2 /17



SYM 231.1 /17

EXPLOSION PROOF WORK LIGHT MIL-F-16377/49



SYM 306.2 /49

STEP LIGHT MIL-F-16377/59



SYM 353 /59

SYM 353.1 /59

SYM 353.2 /59

TO ORDER  LED LIGHTING SOLUTIONS www.LEDLightingSolutions.com Main: 855.309.1702 Direct: 941.405.6473 kbutton@1lls.com